


F1 系列 3GHz 军标电缆组件



产品规格书
Product Specification

规格型号
Product Mode
F1-NMNM-L

示意图 Sketch Map:

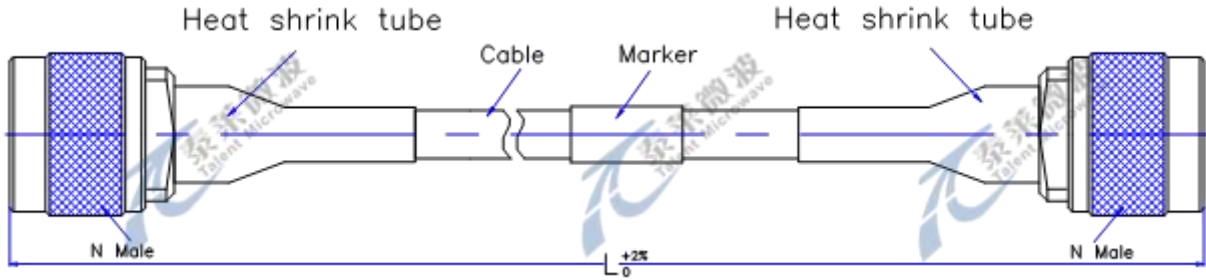

电性能&机械性能 Electrical & Mechanical Characteristics

特性阻抗 Impedance(Ohm)	50
截止频率 Operating Frequency(GHz)	3.0
介质耐压 Dielectric Withstanding Voltage(V)	1000
电压驻波比 VSWR	1.15:1@3GHz
屏蔽效率 Shielding Effectiveness(dB)	60
传播速率 Velocity Of Propagation (%)	66
静态最小弯曲半径 Min. Bending Radius Static (mm)	25
工作温度 Operating Temperature(°C)	-25~+70
电缆直径 Cable Diameter (mm)	4.95

产品型号 Part Number	最大插入损耗 Max Insertion Loss ≤ (dB)			
	0.4GHz	1.0GHz	2.5GHz	3.0GHz
F1-NMNM-0.5M	0.19	0.32	0.57	0.61
F1-NMNM-1.0M	0.34	0.57	1.04	1.12
F1-NMNM-2.0M	0.65	1.07	1.98	2.13
电缆连续波功率 Power CW for Cable (Watts)	90	55	35	29

接头类型和长度可接受定制，型号编码指南

(part number coding for different connector and different length)

