

Model:TLLA0.3G20G-14-30
Low Noise Amplifier
0.3-20GHz, NF:3.0dB, Gain:14dB,P1dB:11dBm
Feature:

- Ultra Wide Band: 0.3-20GHz
- Gain: 14dB Typ
- Noise Figure: 3.0dB Typ
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

电气特性 Electrical:

参数Parameter	Min.	Typ.	Max.	单位Units
频率范围 Frequency range	0.3-20			GHz
增益 Gain	11	14		dB
增益平坦度 Gain Flatness		±3.0	±5.0	dB
噪声系数 Noise Figure		3.0	3.8	dB
线性输出功率Output P1dB		11		dBm
三阶交调 IP3		20		dBm
输入驻波 Input VSWR		1.6	2.0	:1
输出驻波 Output VSWR		1.5	2.0	:1
直流电压 DC Voltage		+12		V DC
直流电流 DC Supply Current		70		mA
阻抗 Impedance	50			Ohms

机械特性 Mechanical :



参数Parameter	指标 Value	单位Units
输入输出接口Input /Output Connector	SMA Female	
直流偏置 Bias	Solder Pin	
尺寸 Size	17*17*8	mm
重量 Weight	/	g


**Available 220V System
Benchtop Amplifier**
绝对最大值 Absolute Maximum Ratings:

参数Parameter	指标 Value
供电偏置电压 Supply Bias Voltage	
输入功率 RF Input Power	10 dBm
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V

外形尺寸 Outline Drawing:

Unit: mm(inches)

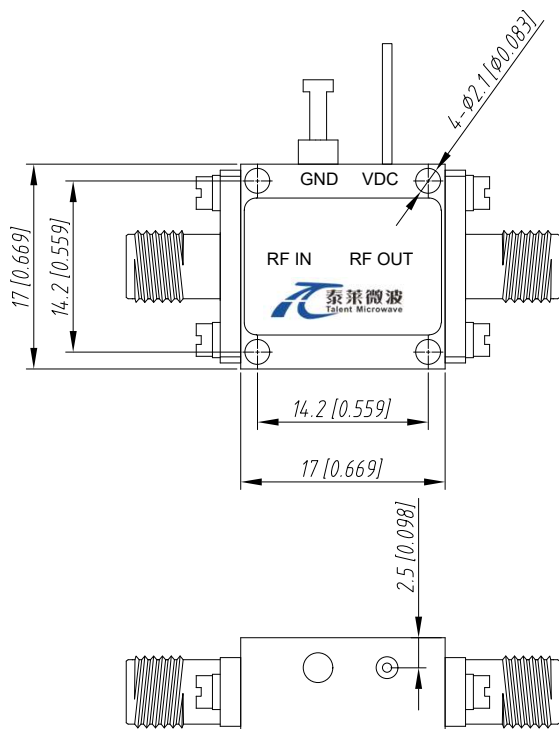

OBSERVE PRECAUTIONS
ELECTROSTATIC SENSITIVE
DEVICES

*****Heat Sink Required During Operation**

温度环境 Environmental Conditions:

参数Parameter	Min.	Typ.	Max.	单位Units
操作温度 Operating Temperature	-45		+85	°C
存储温度 Non-operating Temperature	-55		+125	°C
相对湿度 Relative humidity		95		%
海拔 Altitude	50,000			feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

订货信息 Ordering Information:

标准型号 Part Number	描述 Description	版本号Revision
TLLA0.3G20G-14-30	Low Noise Amplifier, 0.3-20GHz, Noise Figure:3.0 dB, Gain:14 dB,P1dB:11dBm,12V DC,Without Heatsink	Rev.1.1
TLLA0.3G20G-14-30-HS	Low Noise Amplifier, 0.3-20GHz, Noise Figure:3.0 dB, Gain:14 dB,P1dB:11dBm,12V DC,With Heatsink	Rev.1.1