

Model:TLPA50K20G-28-20
Power Amplifier
50K-20GHz, Gain:28dB,Psat:20dBm
Feature :

- Ultra Wide Band: 50KHz-20GHz
- Gain: 28 dB
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

电气特性 Electrical:

参数Parameter	Min.	Typ.	Max.	单位Units
频率范围 Frequency range	50KHz-20GHz			
增益 Gain		28		dB
增益平坦度 Gain Flatness			±1.5	dB
噪声系数 Noise Figure		3.0		dB
输出功率Psat	18.5	20		dBm
输入驻波 Input VSWR		2.0		:1
输出驻波 Output VSWR		2.0		:1
直流电压 DC Voltage		+8		V DC
直流电流 DC Supply Current		120		mA
阻抗 Impedance	50			Ohms

机械特性 Mechanical :


参数Parameter	指标 Value	单位Units
输入输出接口 Input /Output Connector	SMA Female	
直流偏置 Bias	Solder Pin	
重量 Weight	/	g


绝对最大值 Absolute Maximum Ratings:

参数Parameter	指标 Value
供电偏置电压 Supply Bias Voltage	+10 V
输入功率 RF INPUT POWER	+12 dBm
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V

外形尺寸 Outline Drawing:

Unit: mm(Inch)

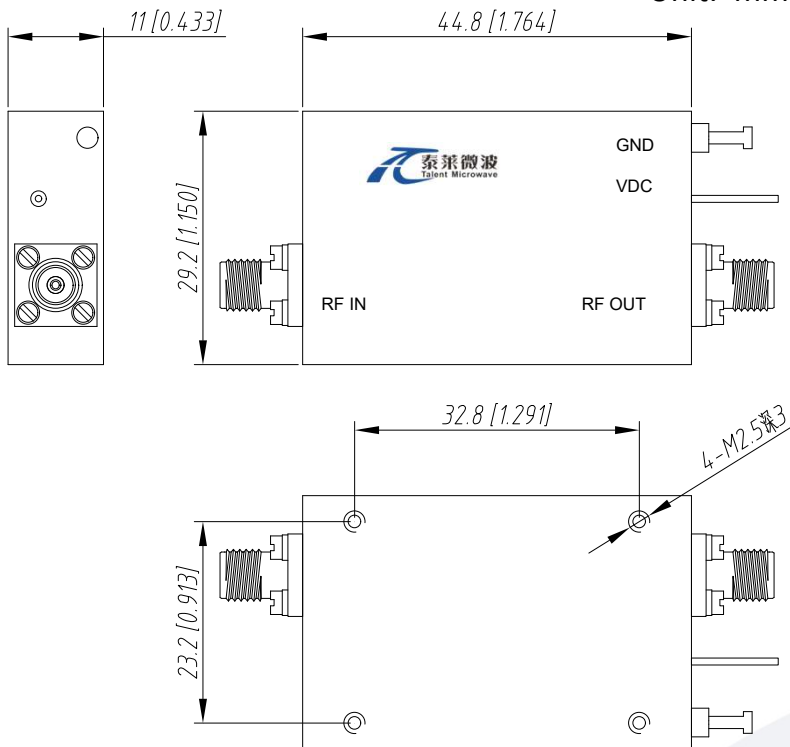

*****Heat Sink Required During Operation**



OBSERVE PRECAUTIONS
ELECTROSTATIC SENSITIVE
DEVICES

温度环境 Environmental Conditions:


参数Parameter	Min.	Typ.	Max.	单位Units
操作温度 Operating Temperature	-45		+85	°C
存储温度 Non-operating Temperature	-55		+125	°C
相对湿度 Relative humidity		95		%
海拔 Altitude	50,000			feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

订货信息 Ordering Information:


标准型号 Part Number	描述 Description	版本号Revision
TLPA50K20G-28-20	Power Amplifier 50K-20GHz, Gain:28dB,PsatdB:20dBm,8V DC,Withou Heatsink	Rev.1.0
TLPA50K20G-28-20-HS	Power Amplifier 50K-20GHz, Gain:28dB,PsatdB:20dBm,8V DC,With Heatsink	Rev.1.0

典型曲线 Typical Performance Data:

Gain&VSWR

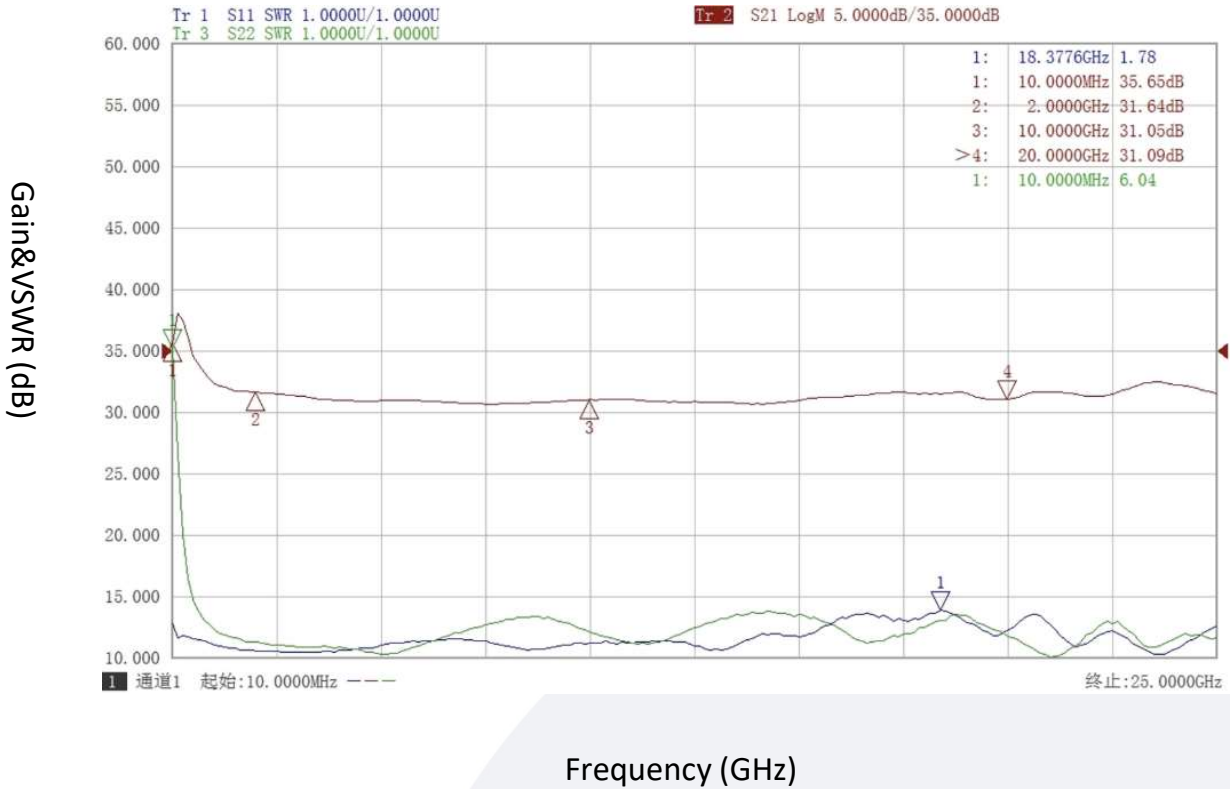


P1dB

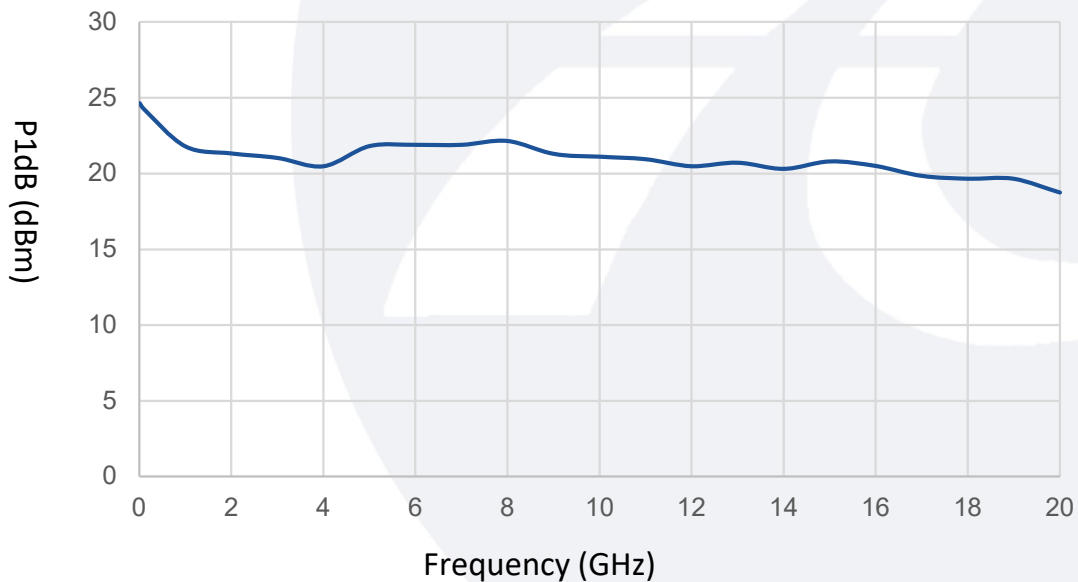

典型曲线 Typical Performance Data:

Psat

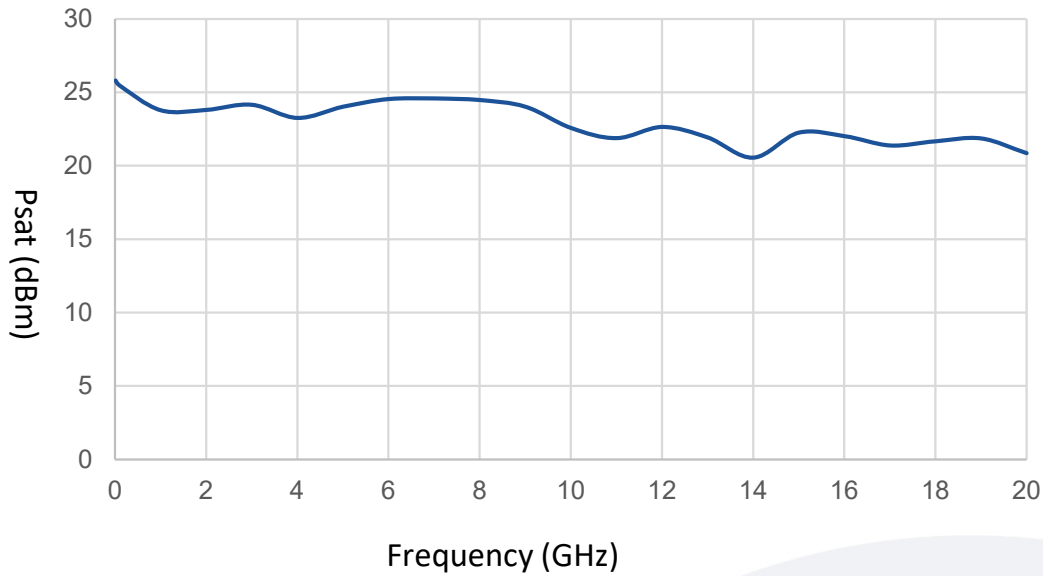

Noise Figure

