


### Electrical & Environmental Characteristics

Impedance	50 Ohm
Insulation Resistance	5000 MΩ
Operating Frequency	DC~67GHz
Dielectric Withstanding Voltage	1000 V
VSWR	≤1.25:1
Insertion Loss	≤0.60 dB
Operating Temperature	-55~+165℃

### Material & Coat-Plating

Inner Conductor	Beryllium copper, Gold
Dielectric	PEI
Body	Stainless Steel, Passivated
Coupling Nut	N/A

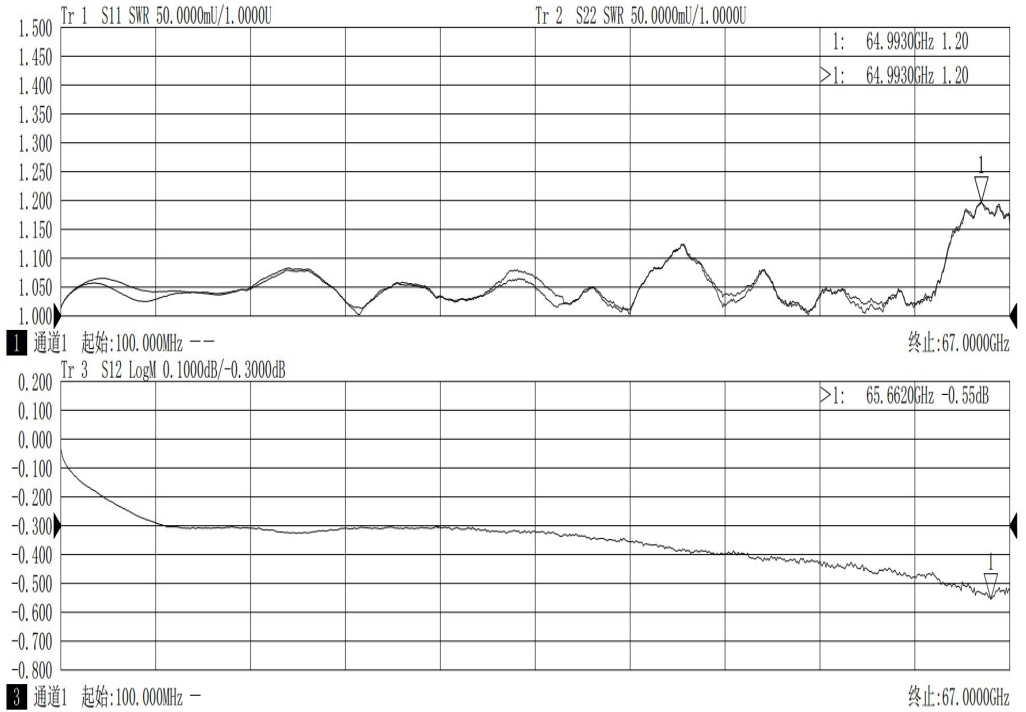

扫描类型	起始频率	终止频率	扫描点数	中频带宽 (Hz)	扫描时间 (s)	端口1, 2功率 (dBm)
通道1 线性扫描	0.100000000GHz	67.000000000GHz	801	1000	0.806015	-5.0, -5.0

THIS DRAWING IS A CONTROLLED DOCUMENT		DWN	Suzhou Talent Microwave, Inc			
		CHK				
Unit mm	TOLERANCES UNLESS OTHERWISE SPECIFIED 0 PLC ±0.25 1 PLC ±0.15 2 PLC ±0.12 3 PLC ± 3 PLC ± ANGLES ±1°	APVD	Product Mode			
		PRODUCT SPEC	1.0/1.85-KKG-1			
		APPLICATION SPEC	1.0mm Female to 1.85mm Female Adaptor			
MATERIAL SEE TABLE	FINISH SEE TABLE	WEIGHT	SIZE A4	GAGE CODE OT8L4	DRAWING NO	
			CUSTOMER DRAWING	SCALE 4: 1	SCALE 4: 1	SHEET1 OF 1 RVE 1