

Part No.: TC-05180-30S

30dB Directional Coupler SMA- Female 50Ω 500-18000MHz

电气特性 Electrical:

工作频率 Frequency Range: 500-18000MHz
 耦合度 Coupling: 30±1dB
 插入损耗 Insertion Loss: ≤1.8dB
 驻波 VSWR: ≤1.7:1
 方向性 Directivity: ≥10dB
 耐功率 Power Handling: 30Watt
 阻抗 Impedance: 50Ω








机械特性 Mechanical:

温度范围 Temperature Range: -40° C - +80° C
 接口 Connectors: SMA-Female
 相对湿度 Relative Humidity: 0 ~ 90%

外形尺寸 Outline Drawing:

Unit: mm

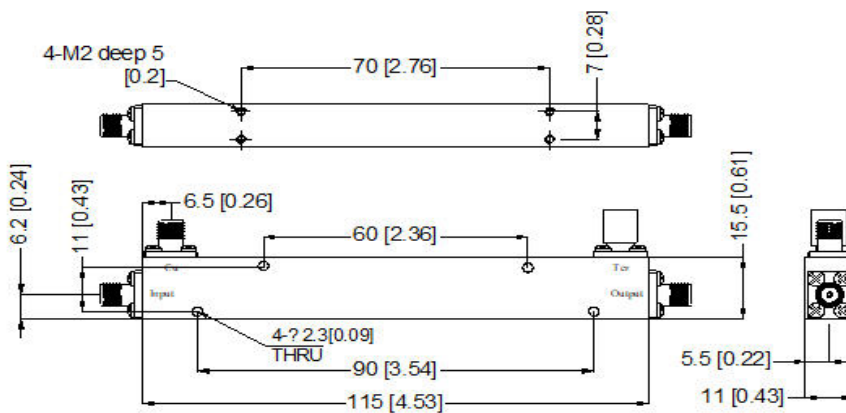

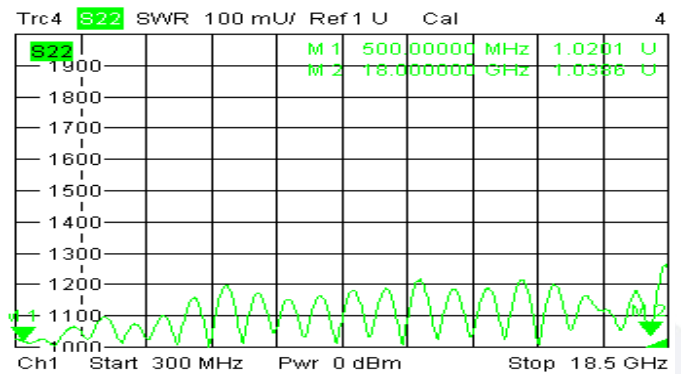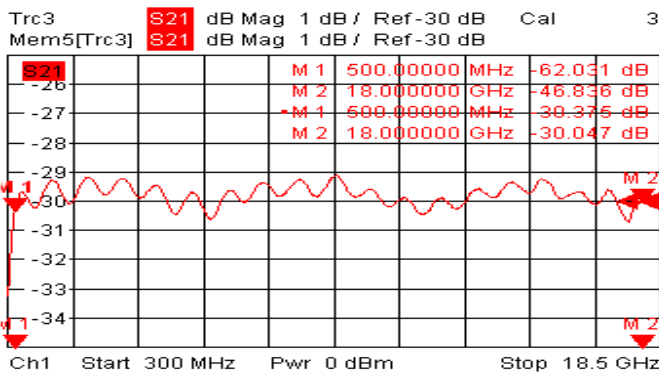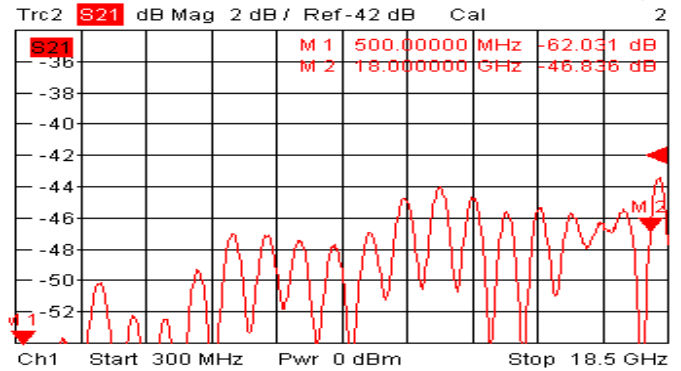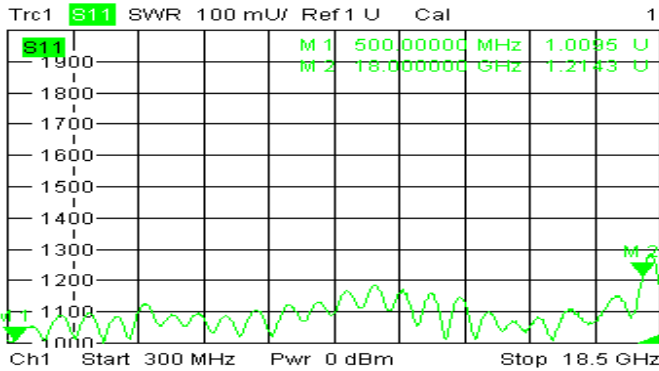


11/29/2018, 2:49 PM



Trc3 **S21** dB Mag 1 dB / Ref 0 dB Cal

3 of 4 (Max)

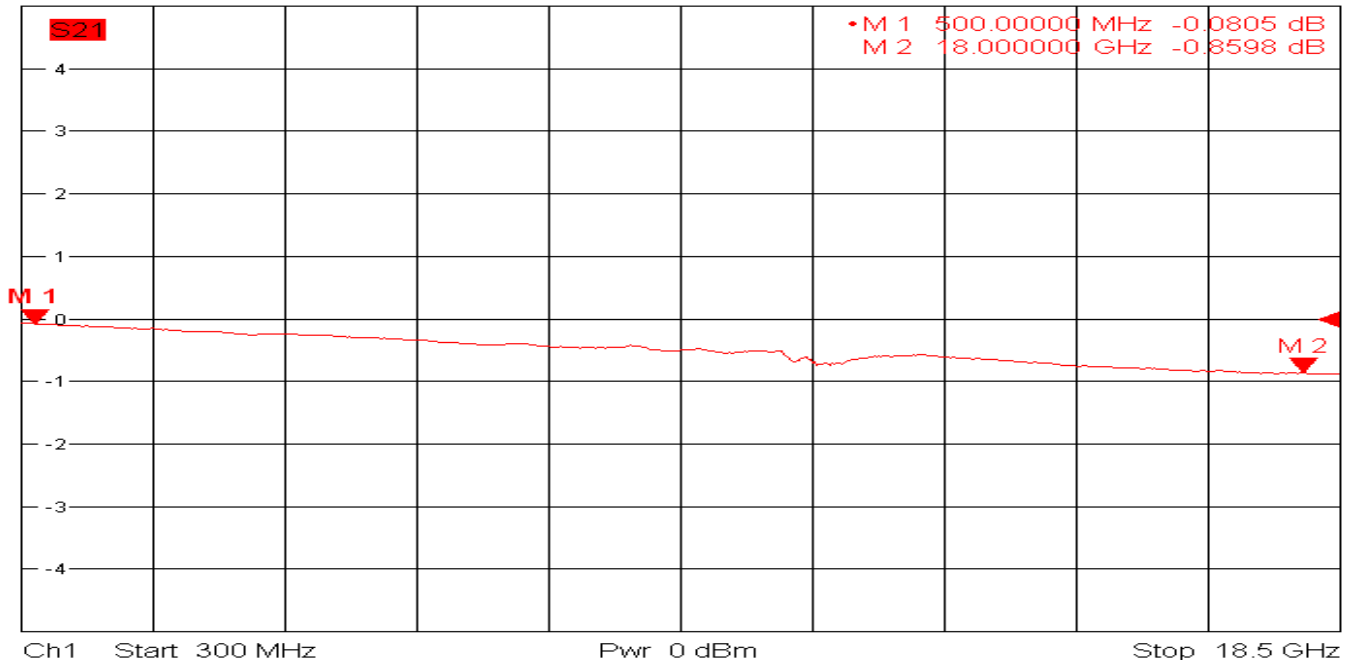

11/29/2018, 3:02 PM