

Model:TLPA500M3000M-50-50-BC
**Benchtop Power Amplifier
 500-3000MHz, Gain:50dB, Psat:50dBm**
Feature:

- Ultra Wide Band: 500-3000MHz
- Gain: 50dB Min
- Output Power Psat: 50dBm
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

电气特性 Electrical:

参数Parameter	Min.	Typ.	Max.	单位Units
频率范围 Frequency range	500-3000			MHz
增益 Gain	50			dB
增益平坦度 Gain Flatness		±3.0	±4.0	dB
线性输出功率P1dB		47		dBm
饱和输出功率Psat	50			dBm
杂散 Non-Harmonic Spurious			-60	dBc
谐波 Harmonics			-10	dBc
增益调节范围 Gain adjustable range	30			dB
输入驻波 Input VSWR		1.5	2.0	:1
交流电压 AC Voltage	110	220		V AC
交流电流 AC Supply Current	2.5A@220V AC			A
阻抗 Impedance	50			Ohms

机械特性 Mechanical :




参数Parameter	指标 Value	单位Units
输入输出接口 Input /Output Connector	N Female	
尺寸 Size	3U*500mm深度	
重量 Weight	10	kg

绝对最大值 Absolute Maximum Ratings:

参数Parameter	指标 Value
输入功率 RF INPUT POWER	5 dBm
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V


外形尺寸Outline Drawing:

Unit: mm

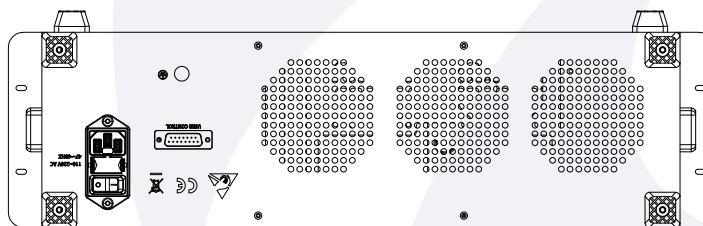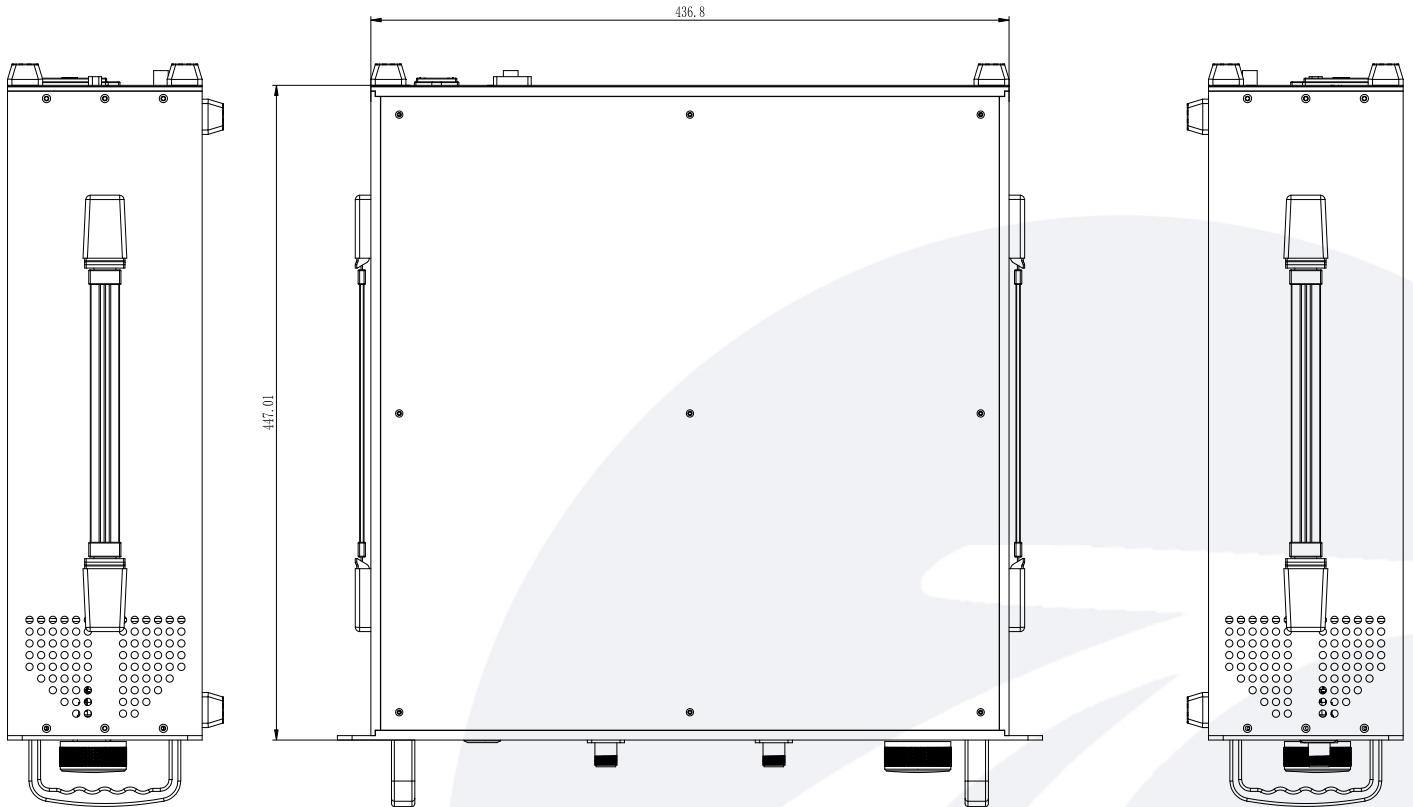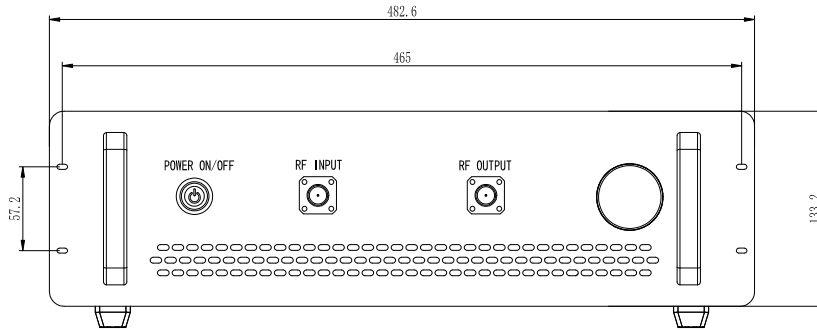

外形尺寸 Outline Drawing:

Unit: mm

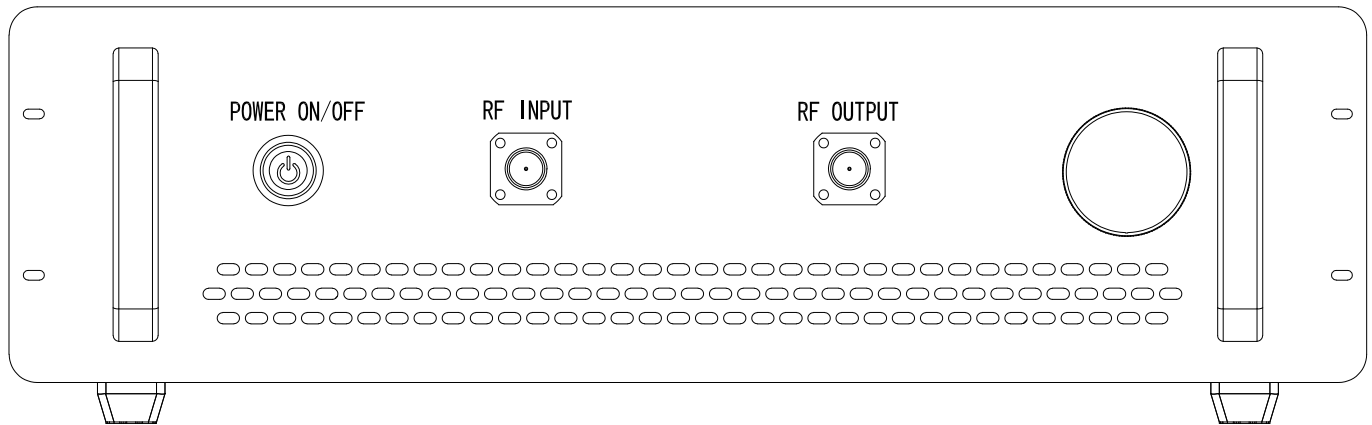

温度环境 Environmental Conditions:

参数Parameter	Min.	Typ.	Max.	单位Units
操作温度 Operating Temperature	-45		+50	°C
存储温度 Non-operating Temperature	-55		+125	°C
相对湿度 Relative humidity		95		%
海拔 Altitude	30,000			feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

订货信息 Ordering Information:

标准型号 Part Number	描述 Description	版本号Revision
TLPA500M3000M-50-50-BC	Power amplifier 500-3000MHz,Gain:50dB,Psat:50dBm,220V AC,Built in Fan Cooling	Rev.1.0