

Model: TMPA-076081-3526-12
Terahertz Power Amplifier
76-81 GHz, Psat:26dBm, Gain:35dB
Feature:

- Frequency Range: 76-81 GHz
- Gain: 35dB Min
- Output Power Psat: 26dBm Type
- Good Power and Gain Flatness

电气特性 Electrical:

参数Parameter	Min.	Typ.	Max.	单位Units
频率范围 Frequency range	76-81			GHz
增益 Gain	35	36		dB
饱和输出功率 Output Psat	25	26		dBm
输入回拨损耗 Input Return Loss		10		dB
输出回拨损耗 Output Return Loss		10		dB
直流电压 DC Voltage		+12		V DC
直流电流 DC Supply Current		1200		mA

机械特性 Mechanical :

参数Parameter	指标 Value	单位 Units
输入输出接口 Input /Output Connector	WR-12/UG-387	
直流偏置 Bias	Solder Pin	
尺寸 Size	射频主腔体: 56×38×24mm ³ 含散热器及法兰: 56×82×74mm ³	
重量 Weight	/	g

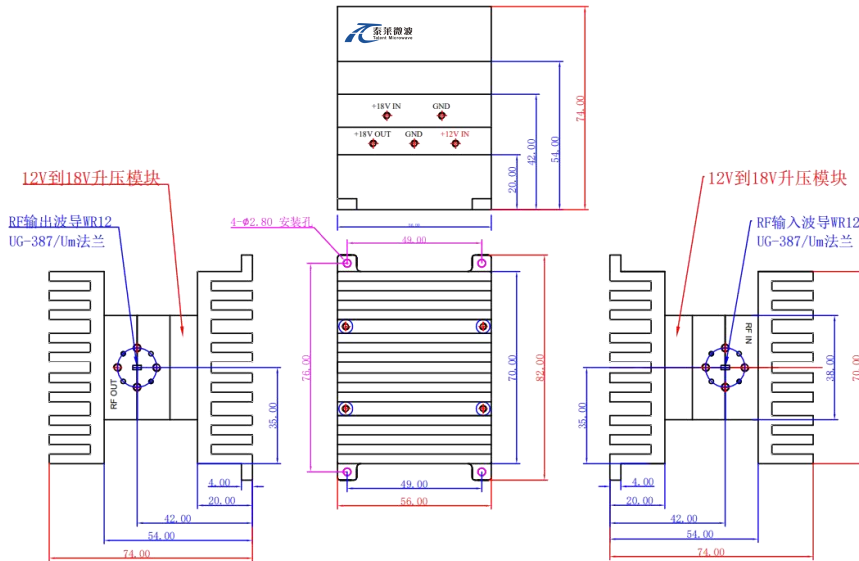

 Available 220V System
 Benchtop Amplifier

绝对最大值 Absolute Maximum Ratings:

参数Parameter	指标 Value
供电偏置电压 Supply Bias Voltage	TBD
输入功率 RF INPUT POWER	TBD
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V

外形尺寸 Outline Drawing:

Unit: mm(Inches)



76~81GHz 26dBm 功率放大器外形图 (12V供电版本)



OBSERVE PRECAUTIONS
ELECTROSTATIC SENSITIVE
DEVICES

温度环境 Environmental Conditions:

参数Parameter	Min.	Typ.	Max.	单位Units
操作温度 Operating Temperature	-45		+85	°C
存储温度 Non-operating Temperature	-55		+125	°C
相对湿度 Relative humidity		95		%
海拔 Altitude	30,000			feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

订货信息 Ordering Information:

标准型号 Part Number	描述 Description	版本号Revision
TMPA-076081-3525-12	Power Amplifier,76-81GHz, Gain:35dB Min, Psat:26dBm Type,5V DC WR-12	Rev.1.1