

Part No.: TC-80120-20S

20dB Directional Coupler SMA-Female 50Ω 8G-12G

电气特性 Electrical:


工作频率 Frequency Range: 8-12 GHz
 耦合度 Coupling: 20 ± 1.0db
 插入损耗 Insertion Loss: 0.4db typ, 0.5db max
 方向性 Directivity: 15db typ, 14db min
 驻波 VSWR: 1.4 max
 耐功率 Power Handling: 50 Watt
 阻抗 Impedance: 50 OHMS





机械特性 Mechanical:

温度范围 Temperature Range: -45° C - +85° C
 接口 Connectors: SMA-Female
 相对湿度 Relative Humidity: 0 ~ 90%

外形尺寸 Outline Drawing:

Unit: mm

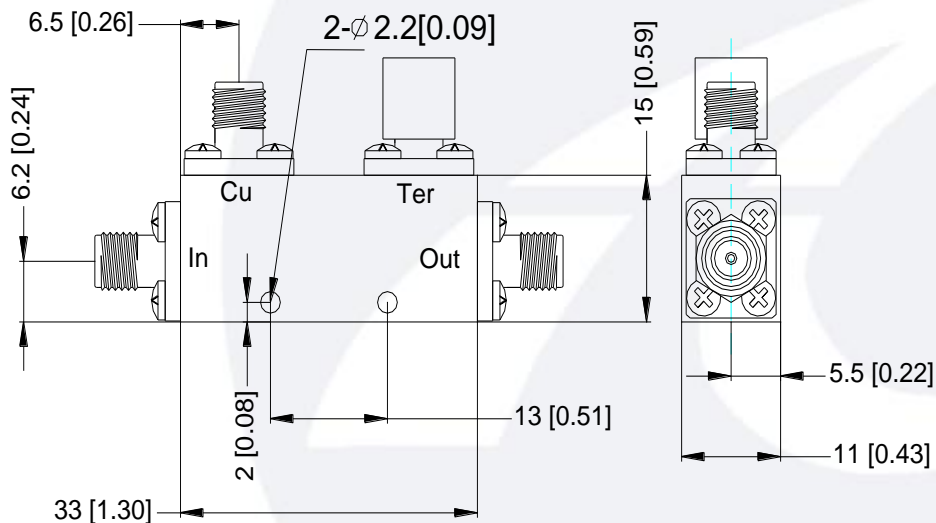


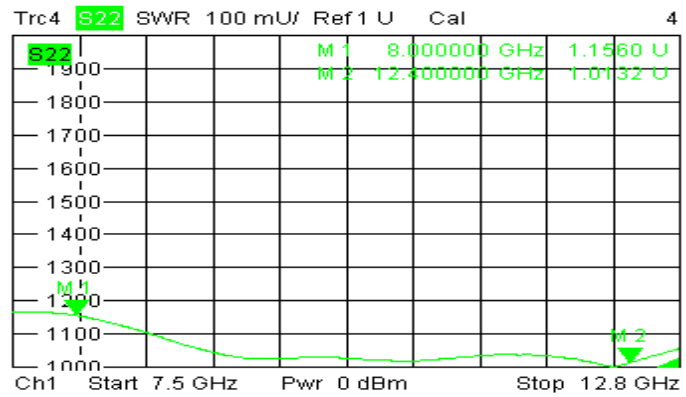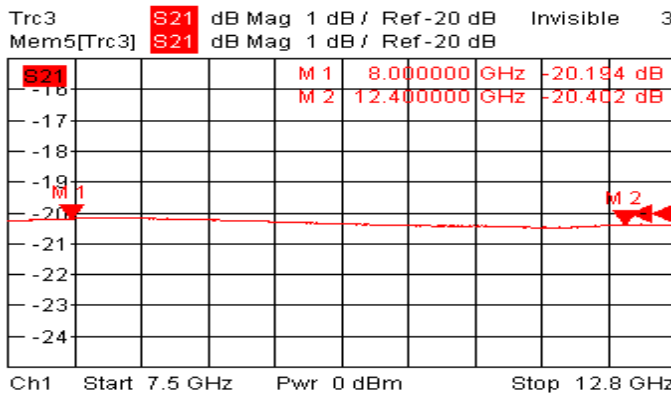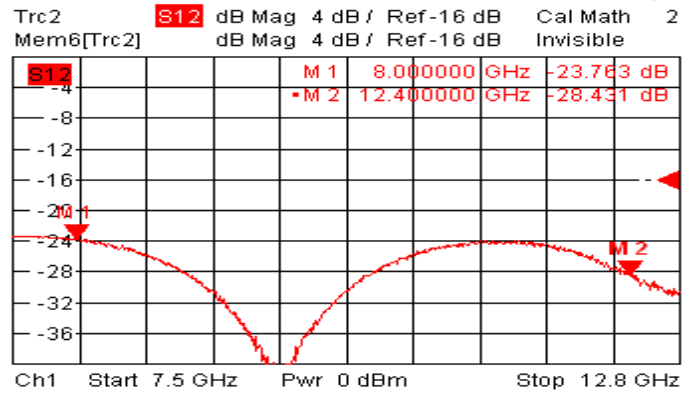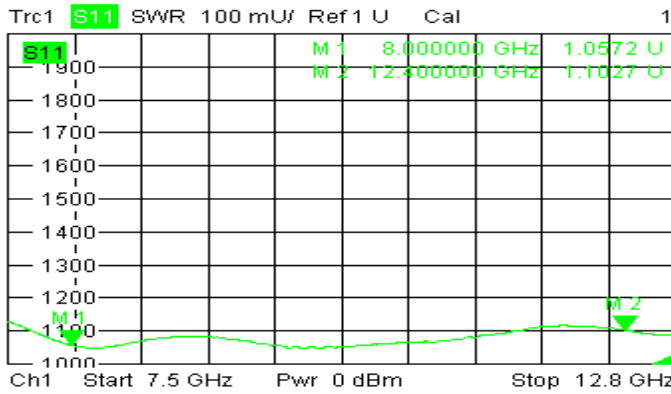

10/12/2019, 11:40 AM

Trc3 **S21** dB Mag 0.5 dB / Ref 0 dB Cal
Mem5[Trc3] **S21** dB Mag 0.5 dB / Ref 0 dB Invisible

3 of 4 (Max)

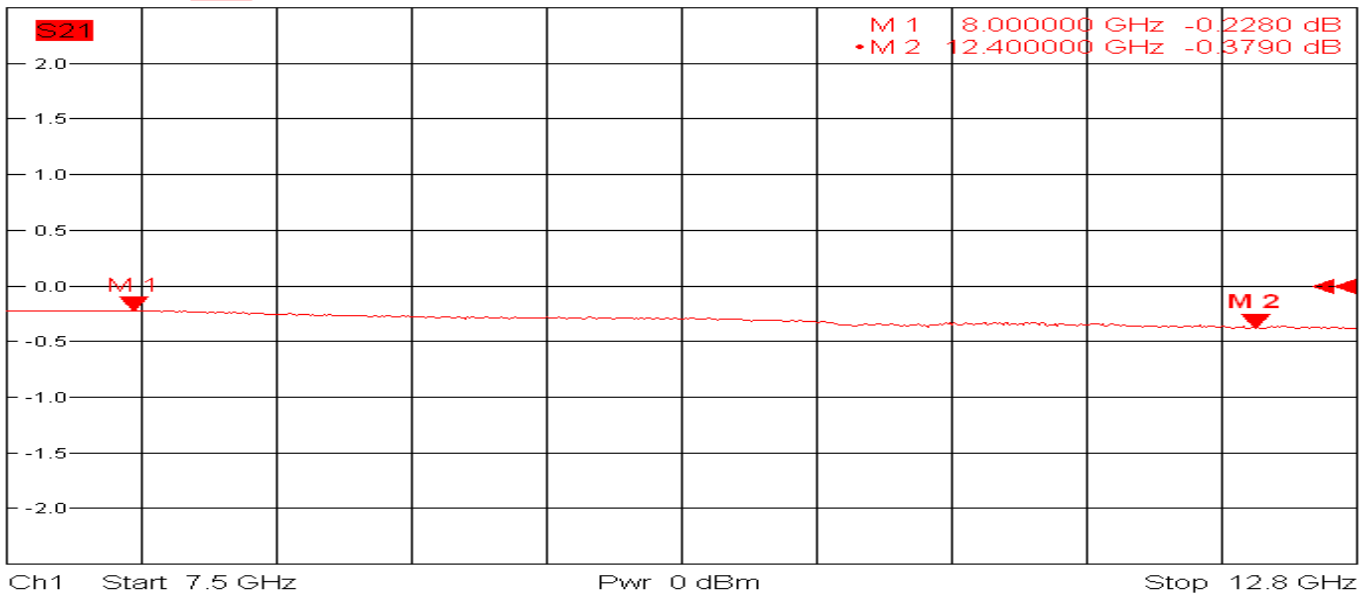

10/12/2019, 11:44 AM