

Model:TLPA700M2G2-62-32
Power Amplifier
700MHz-2.2GHz, Gain:62dB, P1dB:32dBm
Feature:

- Ultra Wide Band: 700MHz-2.2GHz
- Gain: 62dB Min
- P1dB Output Power: 32 dBm Min
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

电气特性 Electrical:

参数Parameter	Min.	Typ.	Max.	单位Units
频率范围 Frequency range	0.7-2.2			GHz
增益 Gain	62			dB
增益平坦度 Gain Flatness	≤ ±2			dB
增益平坦度 Gain Flatness	703~748/1710~1785/1920~1980/≤ ±0.5			dB
噪声系数 Noise Figure		2.5	3.0	dB
线性输出功率P1dB	≥32			dBm
谐波抑制@Pout=33dBm	≥25			dBc
输入驻波 Input VSWR		1.5	2.0	:1
直流电压 DC Voltage		28		V DC
直流电流 DC Supply Current	2000			mA
阻抗 Impedance	50			Ohms

机械特性 Mechanical :


参数Parameter	指标 Value	单位Units
输入输出接口 Input /Output Connector	SMA Female	
直流偏置 Bias	Solder Pin	
尺寸 Size	140X80X22	mm
重量 Weight	200	g


绝对最大值 Absolute Maximum Ratings:

参数Parameter	指标 Value
供电偏置电压 Supply Bias Voltage	32
输入功率 RF INPUT POWER	-20 dBm
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V

外形尺寸 Outline Drawing:

Unit: mm

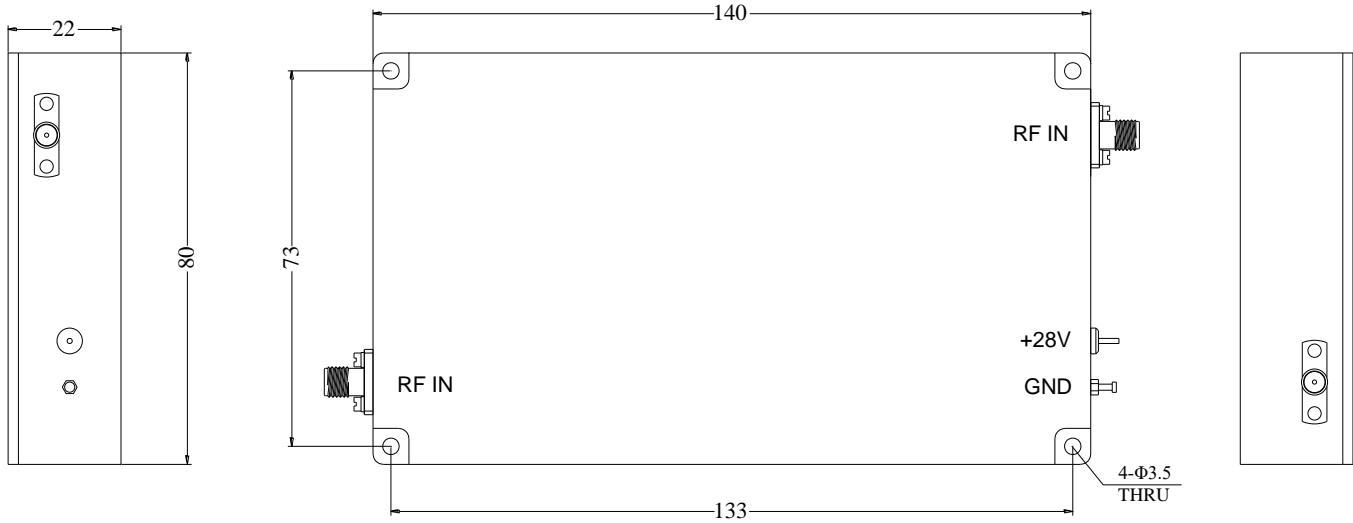

*****Heat Sink Required During Operation**



OBSERVE PRECAUTIONS
ELECTROSTATIC SENSITIVE
DEVICES

温度环境 Environmental Conditions:

参数Parameter	Min.	Typ.	Max.	单位Units
操作温度 Operating Temperature	-45		+85	°C
存储温度 Non-operating Temperature	-55		+125	°C
相对湿度 Relative humidity		95		%
海拔 Altitude	30,000			feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

订货信息 Ordering Information:

标准型号 Part Number	描述 Description	版本号Revision
TLPA700M2G2-62-32	Power amplifier 700MHz-2.2GHz, Gain:62dB, P1dB:32dBm, 28V DC, Without Heatsink	Rev.1.0
TLPA700M2G2-62-32-HS	Power amplifier 700MHz-2.2GHz, Gain:62dB, P1dB:32dBm, 28V DC, With Heatsink	Rev.1.0