

Model: TG-90K26G-16-S
**HIGH DIRECTIVITY BRIDGE COUPLER
 90KHz-26.5 GHz, 16dB Coupling**
Feature:

- Ultra Wide Band: 90KHz-26.5 GHz
- High Directivity
- Low VSWR
- 50 Ohm Matched Input / Output

电气特性 Electrical:

参数Parameter		Min.	Typ.	Max.	单位Units
频率范围 Frequency range		90KHz-26.5			GHz
耦合度 Coupling			16.5±1.5		dB
插损 Insertion Loss				3.5	dB
方向性 Directivity		18			dB
回波损耗 Return Loss	输入端 Input			-16	dB
	输出端 Output			-15	dB
	耦合端 Coupled			-12	dB
耐功率 Power				1	W
阻抗 Impedance		50			Ohms

机械特性 Mechanical :


参数Parameter	指标 Value
输入接口 Input Connector	SMA Female
输出接口 Output Connector	SMA Female
耦合接口 Coupled Connector	SMA Female
材料 Material	Cu
尺寸 Size	39.7×18.3×13.5 mm

绝对最大值 Absolute Maximum Ratings:

参数Parameter	指标 Value
输入功率 RF Input Power	1W
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V

外形尺寸 Outline Drawing:

Unit: mm

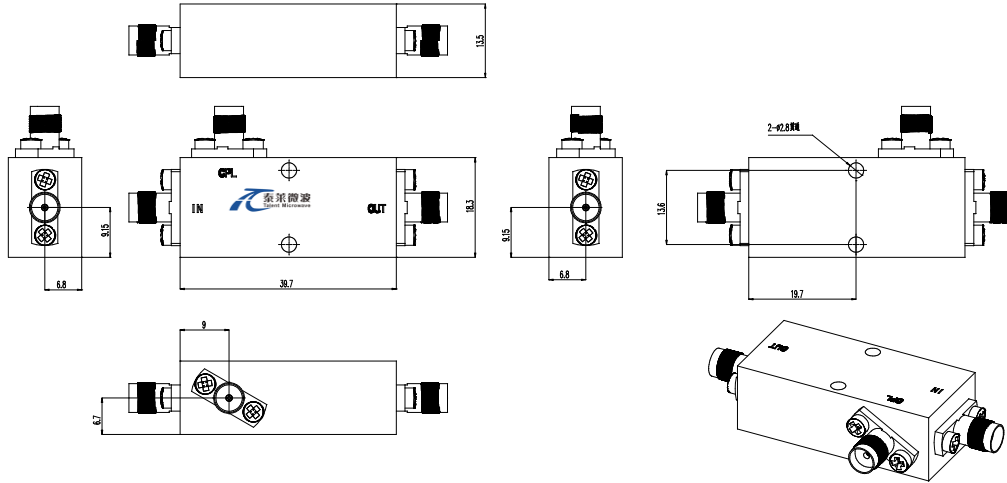

OBSERVE PRECAUTIONS
ELECTROSTATIC SENSITIVE
DEVICES

温度环境 Environmental Conditions:

参数Parameter	Min.	Typ.	Max.	单位Units
操作温度 Operating Temperature	-40		+85	°C
存储温度 Non-operating Temperature	-55		+125	°C
相对湿度 Relative humidity		95		%
海拔 Altitude	10000		30000	feet
震动 Shock / Vibration(MIL-STD-810F)		Airborne		
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

订货信息 Ordering Information:

标准型号 Part Number	描述 Description	版本号Revision
TG-90K26G-16-S	HIGH DIRECTIVITY BRIDGE COUPLER 90KHz-26.5 GHz, 16dB Coupling,SMA Female	Rev.1.1